


Preinsulated Terminals

PVC Insulated Fork Terminals

OUMO PUBLISH

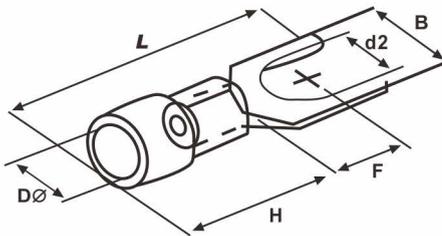

Specifications	USA Bolt No.	Dimension						Color	Remark	Code No.
		Bolt dia.	B	L	F	H	DØ			
		d2	mm	mm	mm	mm	mm			
SV1.25-3	#4	3.2mm	5.7	21.2	6.5	10	4.3	red	Material:Copper,PVC Wirerange:0.5~1.5mm ² Max.current=19A	OMU-SV-001
SVS1.25-3.5	#6	3.7mm	5.7	21.2	6.5					OMU-SV-002
SVL1.25-3.5	#6	3.7mm	6.4	21.2	6.5					OMU-SV-003
SVS1.25-4	#8	4.3mm	6.4	21.2	6.5					OMU-SV-004
SVM1.25-4	#8	4.3mm	7.2	21.2	6.5					OMU-SV-005
SVL1.25-4	#8	4.3mm	8.1	21.2	6.5					OMU-SV-006
SVS1.25-5	#10	5.3mm	8.1	21.2	6.5					OMU-SV-007
SVL1.25-5	#10	5.3mm	9.5	21.2	6.5					OMU-SV-008
SVS1.25-6	1/4	6.5mm	9.5	21.2	6.5					OMU-SV-009
SVL1.25-6	1/4	6.5mm	12	27.2	11					OMU-SV-010
SV2-3	#4	3.2mm	5.7	21.2	6.5	10	4.9	blue	Material:Copper,PVC Wirerange:1.5~2.5mm ² Max.current=27A	OMU-SV-011
SVS2-3.5	#6	3.7mm	5.7	21.2	6.5					OMU-SV-012
SVL2-3.5	#6	3.7mm	6	21.2	6.5					OMU-SV-013
SVS2-4	#8	4.3mm	6.4	21.2	6.5					OMU-SV-014
SVM2-4	#8	4.3mm	7.2	21.2	6.5					OMU-SV-015
SVL2-4	#8	4.3mm	8.1	21.2	6.5					OMU-SV-016
SVS2-5	#10	5.3mm	8.1	21.2	6.5					OMU-SV-017
SVL2-5	#10	5.3mm	9.5	21.2	6.5					OMU-SV-018
SVS2-6	1/4	6.5mm	9.5	21.2	6.5					OMU-SV-019
SVL2-6	1/4	6.5mm	12	27.2	11					OMU-SV-020
SV3.5-3	#4	3.2mm	5.7	24.8	7.0	12.5	6.2	black	Material:Copper,PVC Wirerange:2.5~4mm ² Max.current=37A	OMU-SV-021
SV3.5-4	#8	4.3	8.3	24.8	7.0					OMU-SV-022
SVS3.5-5	#10	5.3	8.0	24.8	7.0					OMU-SV-023
SVL3.5-6	1/4	6.5	12.0	28.0	12.1					OMU-SV-024
SV5.5-3.5	#6	3.7mm	8.3	25.2	7.5	12.5	6.7	yellow	Material:Copper,PVC Wirerange:4~6mm ² Max.current=48A	OMU-SV-025
SVS5.5-4	#8	4.3mm	8.3	25.2	7.5					OMU-SV-026
SVL5.5-4	#8	4.3mm	9	25.2	7.5					OMU-SV-027
SV5.5-5	#10	5.3mm	9	25.2	7.5					OMU-SV-028
SVS5.5-6	1/4	6.5mm	9	25.5	7.5					OMU-SV-029
SVL5.5-6	1/4	6.5mm	12	31.2	12					OMU-SV-030
SV5.5-8	5/16	8.4mm	14	30	11.5					OMU-SV-031